




Call us on our Fence Lines:
Prince Albert: 306-763-4264
Saskatoon: 306-249-6742
Toll Free: 1-800-596-9473
Fax: 306-763-0535

Celebrating 27 years

PROFESSIONAL SERIES

Privacy Panel and Gate

Standard "Dig & Pour" Installation Instructions

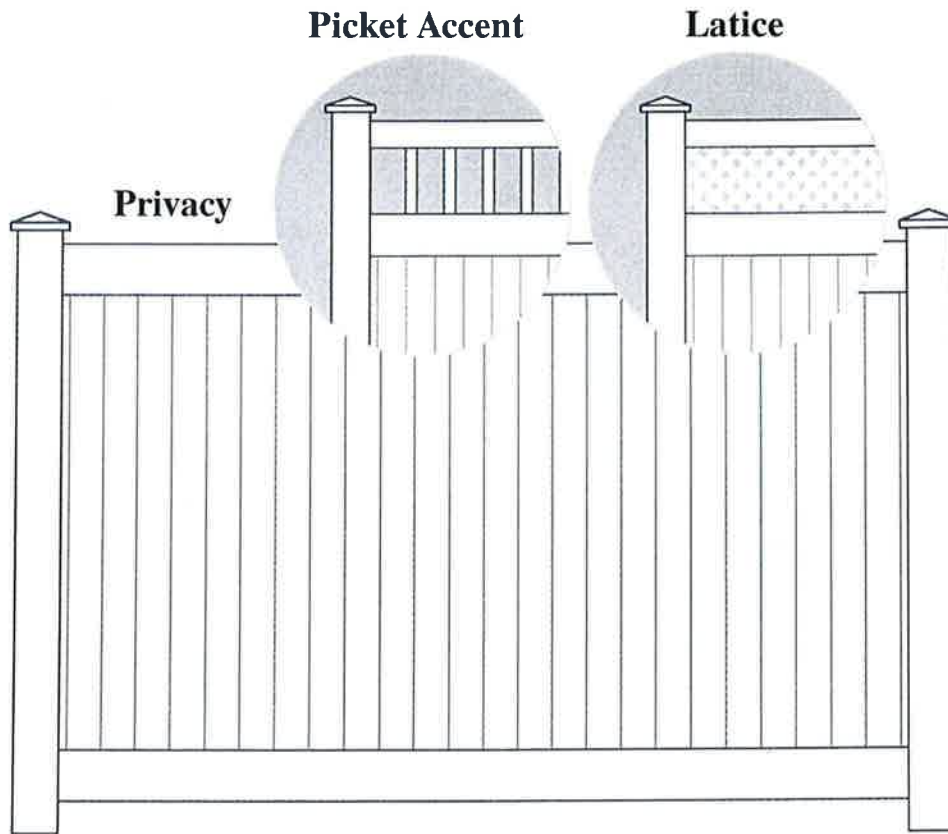



SASKATCHEWANS FENCE MANUFACTURER
SINCE 1984

Before you start, it's important to check...

That fence footings do not exceed legally established property lines. If uncertain, refer to real estate agent's line plot or consult a professional surveyor.

Local codes for specifications regarding frontage locations, allowable fence heights, etc. A permit may be required.

With local utility companies for locations of underground cables or pipelines.

PRIVACY PANEL PARTS LIST

EACH 5' & 6' HIGH PRIVACY PANEL INCLUDES:


- A. 1-1/2" X 5-1/2" Routed Rails (2)
- B. 7/8" X 11.3" Tongue and Groove Pickets
- C. 7/8" PVC U-Channel (2)
- D. Galvanized Steel Insert (1) (for 8' on center post spacing only)
- #14 X 1 1/2" Self Drilling Hex Head Screws (6) - Not shown

Picket Accent

- E. 2" X 3-1/2" Top Rail
- F. 7/8" X 1-1/2" X 12" Accent Pickets

Lattice

- G. 2" X 3-1/2" Top Rail
- H. 12" X 6' or 8' Lattice

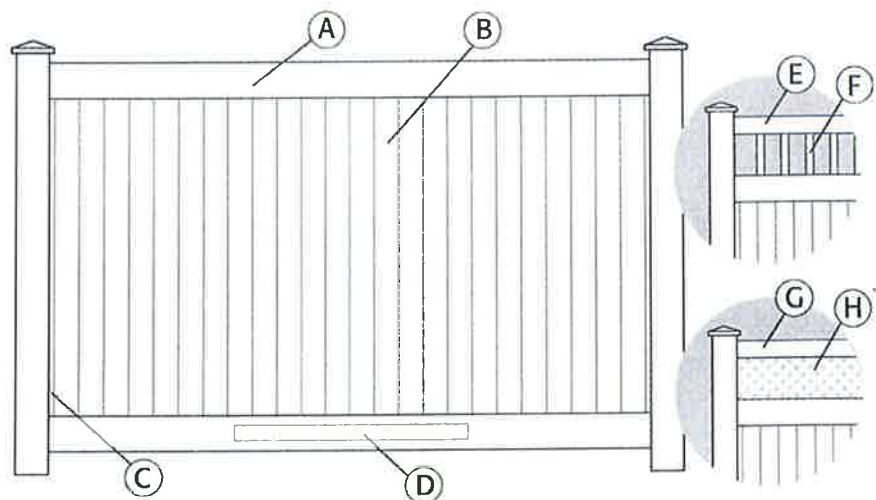



① Prepare Fence Layout

NOTE: Standard fence sections and gates are designed for level terrain. Significant slopes in the terrain will require special modifications to posts and panels (see Section 3).

GENERAL INFORMATION:

Read this instruction sheet completely before starting work.

During panel/gate assembly, work on a soft, non-abrasive surface to avoid scratching the PVC.

When cutting PVC components with a power saw, use a fine-toothed blade (plywood blade, finishing blade, etc.).

Laying out the fence is the critical first step toward ensuring a quality installation.

STEP 1

Locate the boundary lines to your property.

STEP 2

Drive stakes into the ground along the property line and stretch a string between each stake.

Be sure to extend the string about 24" beyond the property line (Fig. 1).

It is recommended that all posts be set approximately 6" inside of the property line so that concrete footings do not encroach onto the adjoining property.

STEP 3

Mark the location of each terminal post with a stake (corner, end and gate posts are called **terminal** posts).

When determining the position of the gate posts, refer to Section 8 - Gate Installation for actual gate opening.

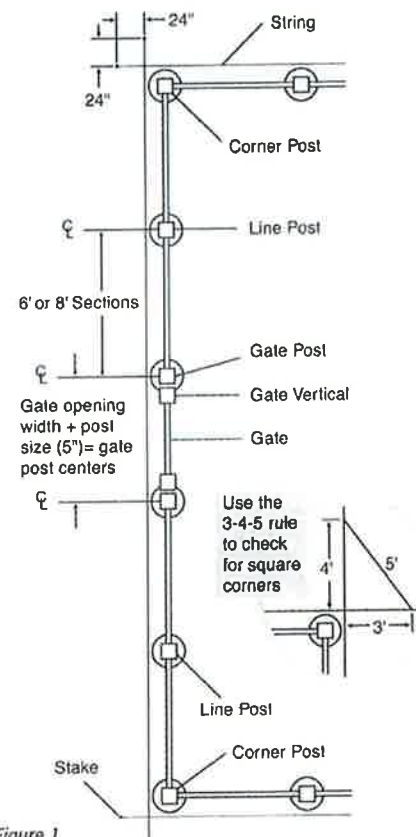


Figure 1



SASKATCHEWANS FENCE MANUFACTURER
SINCE 1984

② Setting Terminal and Line Posts


Although post depth and hole diameter will be determined by local weather and soil conditions, holes for terminal posts and line posts are typically dug 10" in diameter and 36"- 48" deep (Fig. 2).

STEP 1

Dig all post holes 36"- 48" deep and 10" diameter.

STEP 2


Pour concrete in terminal post holes, fill to 2" below ground level. Set terminal posts in concrete relatively soon dependent on specific concrete conditions.

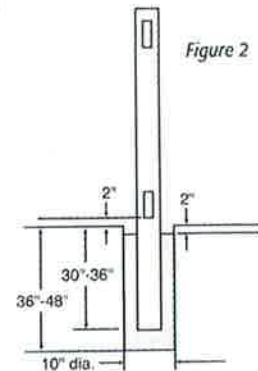

STEP 3

Position the post in the hole. The posts should be centered in the hole and must be square with the fence line so that when the rails are inserted into the posts they will parallel the string line. Check the post on two adjacent sides with a carpenter's level and adjust as necessary to make sure it is plumb. The fence height above grade is determined at this time as well. We recommend 2" be left from the bottom of the bottom rail to the ground.

NOTE: For sloped/variable terrain installations refer to Section 3.




Gate hinge posts are to include 5"x 5"x 108" Galvanized L-Channel Reinforcing Insert for added strength. The corner of the L-Channel is to be oriented towards the corner of the post with the future gate hinge. (refer to Section 8 - Gate Installation)

STEP 4

After the terminal post footings have hardened enough for the posts to remain stable, stake and stretch a string line taut across the tops of the posts to mark the desired height of the line posts (Fig. 3).

STEP 5

Repeat procedure 3 for all line posts.

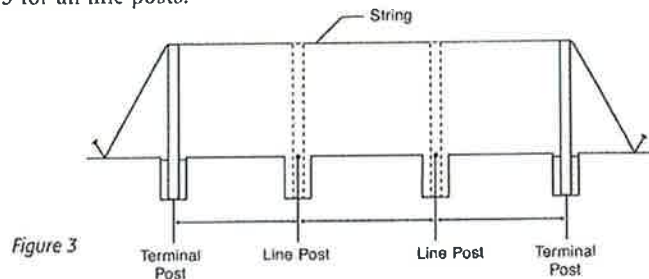



SASKATCHEWANS FENCE MANUFACTURER
SINCE 1984

③ Sloped/Variable Terrain Installation

For typical installations on flat/even ground, the posts are to be set at an elevation with approximately 2" clearance between the bottom of the bottom rail cut out and the ground (Fig. 2). Posts are routed with a standard rail hole (rectangular cut out) which can accommodate an approximate 10% grade change (Fig. 4). For installations with more significant grades, there are two alternate methods of installation. Both will require special shop or field fabrication and therefore should be discussed with fabrication shop prior to order.

A) RACKED INSTALLATION

"Racked" installation enables fence sections (horizontal rails) to "follow" the sloping terrain and maintain the bottom of the fence relatively close to the ground (Fig. 4). When installing multiple sections, it is advisable to use an end post and field fabricate the opposite side of the post to avoid a jagged fence line. Depending on the severity of the rack, special shop or field fabrication of the posts and pickets may be required which include elongating the holes in the posts to accept rails and shortening the length of pickets. In extreme cases, it may be required to decrease the spacing of post centers.


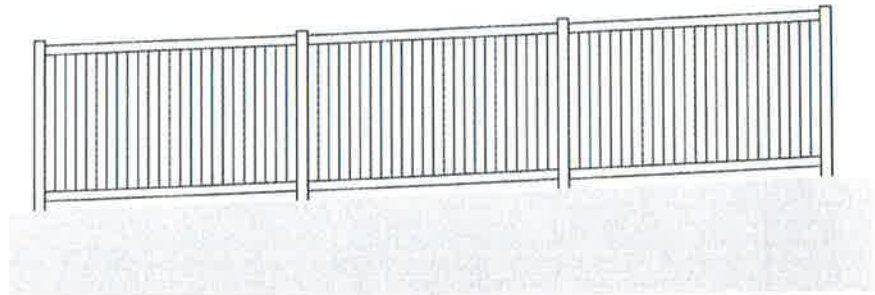


Figure 4



1. Enlarge holes in post to accept rails

- Determine angle or slope
- Place first post in hole and hold plumb
- Place rail next to post (not in routed hole) at correct angle of grade.
- Mark rail where post crosses it on angle
- Remove rail, measure the length of the drawn angle. Add 1/8" to this length to determine proper post hole size
- Enlarge post holes



NOTE: Always open bottom of top hole and top of bottom hole to maintain proper fence height.

- Holes may be cut utilizing a template kit and router or spiral saw
- Determine location of holes on opposite side of line post by laying post across side of rail (align with routed hole) and marking exit position of rail on opposite side of post
- Cut holes with template kit and router or spiral saw as previous



2. Shorten picket length

- For extreme racking situations, picket ends may need to be cut to accommodate rack
- Position top and bottom rails in routed post holes
- Position picket next to rails so it is plumb and aligned with bottom side of bottom rail
- Mark position where top and bottom of picket intersects inside groove of rails; subtract 3/8" and cut picket to length

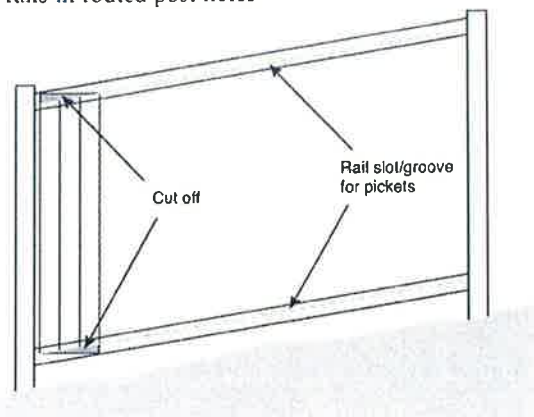



Figure 7



SASKATCHEWANS FENCE MANUFACTURER
SINCE 1984

B) STEPPED INSTALLATION

"Stepped" installation enables the fence sections to maintain a horizontal profile (rails) as they step section to section. Note that the clearance under the fence section will increase as the grade drops off (Fig. 8). Posts are to be installed higher relative to the fence section on high side of the post. In order to accomplish this on a line post, the routed rail hole cut outs will have to be "offset" from one side of the post to the other. Alternately, the fabrication shop can provide a post with rail cut outs only on one side (end post) so as the other offset side can be field routed.

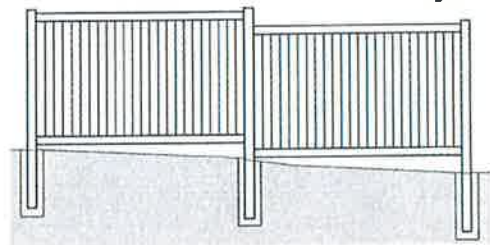

④ Installing Bottom Rails

STEP 1

If post spacing is less than standard 6' or 8' on center, cut a piece from the end of the top and bottom rails to achieve the desired length.

The length of the top and bottom rails should be 1/2" less than the center-to-center measurement of the posts.




STEP 2 (optional)

Using the notching tool, notch both ends of the bottom rail with one or two notches on each side (Fig. 9). Hold the rail and the tool steady while notching, avoid twisting the tool.



STEP 3 (8' on center post spacing)

Slide the metal reinforcing insert into the bottom rail (Fig. 10).



STEP 4

Slide one end of the bottom rail into the bottom hole of terminal post (Fig. 11). Then slide other end of bottom rail into next line post.

STEP 5

Repeat these steps proceeding down the fence line until all bottom rails are inserted.



SASKATCHEWANS FENCE MANUFACTURER
SINCE 1984

⑤ Installing Pickets

STEP 1

Center the U-channels on the post, between the bottom rail and the hole for the top rail with the flat side of the channels against the posts (you can insert a top rail to serve as a guide, if necessary).

Secure the channels to the posts using the #14 x 1 1/2" self drilling hex head screws supplied (Fig. 12).




Figure 12

STEP 2 (optional)

Notch all remaining rails or after sections are complete, drill a screw into top rail from inside of the posts.

STEP 3

If post spacing is less than standard 6' or 8' on center, you may need to cut equal amounts off of the grooved side of the picket on one end of the panel and the tongued side of the picket on the opposite end (Fig. 13).

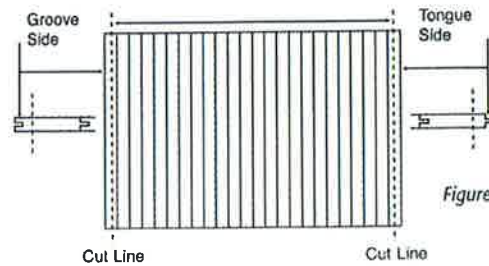


Figure 13

STEP 4

Starting on one end, insert the first picket into the bottom rail and the U-channel. Proceeding down the panel, insert pickets into the bottom rail, interlocking the tongues and grooves as you go. If you have cut the first picket, the cut end should go into the U-channel. (Fig. 14). To ensure a strong, secure fence make sure the pickets are fit tight next to one another.




Figure 14



SASKATCHEWANS FENCE MANUFACTURER
SINCE 1984

⑥ Installing Top Rail/Accent Top

Privacy Top Rail

STEP 1

Place one end of the top rail into the post and work your way down the panel inserting pickets into the top rail as you go (Fig. 15).



Figure 15

STEP 2

Once all of the pickets are installed, slide the loose rail end into the post (Fig. 16).




Figure 16

Repeat these steps until all panels have been assembled.

Picket Accent Top

Install mid rail as per Step 1 & 2 of Privacy Top Rail installation. Note that square holes in mid rail are to face upwards (Fig. 17).




Figure 17

If post spacing is less than standard 6' or 8' on center, you may need to cut some from each end of rail to ensure that the distance from the post to the first picket remains equal on each end (Fig. 18). The length of the top and bottom rails should be 1" less than the center-to-center measurement of the posts.




Figure 18

Slide 7/8" x 1 1/2" x 12" accent pickets into the routed holes in the top of the mid rail (Fig. 19).




Figure 19



SASKATCHEWANS FENCE MANUFACTURER
SINCE 1984

Place one end of the 2" x 3 1/2" top rail into the post and work your way down the panel inserting pickets into the top rail as you go (Fig. 20).




Figure 20

Once all of the pickets are installed, slide the loose rail end into the post (Fig. 21).




Figure 21

Lattice Accent Top

Install mid rail as per Step 1 & 2 of Privacy Top Rail installation. Note that the side with the narrower routed slot is to face upwards (Fig. 22).




Figure 22

Slide 12" x 6' or 8' accent lattice into the routed slot in the top of the mid rail (Fig. 23).




Figure 23



SASKATCHEWANS FENCE MANUFACTURER
SINCE 1984

Place one end of the 2" x 3 1/2" top rail into the post and work your way down the panel inserting lattice into the top rail slot as you go (Fig. 24).

Once all of the lattice is installed, slide the loose rail end into the post (Fig. 25).




Figure 24




Figure 25

⑦ Installing Post Caps (optional)

NOTE: Do not install post caps on gate posts until gate installation is complete.

EXTERNAL CAPS (*slide over the post*)

Apply PVC glue to the inside of the cap and press completely onto the top of the post (Fig. 26). Press firmly to ensure that the cap is on as far as it will go.




Figure 26



⑧ Gate Installation

PRIVACY GATE PARTS LIST

Available in 4', 5' and 6' heights.

- Standard walk gate "opening width" is 43"
- Opening width is the inside post to inside post measurement
- Gates are manufactured 1-1/2" narrower than the opening width to provide clearance for latches and hinges.

EACH PRIVACY GATE INCLUDES:

- A. Gate Panel
- B. Heavy Duty Latch (1)
- C. Heavy Duty Hinges (2)
- D. Gate Hinge Post with L-Channel Insert (1)
- E. Gate Latch Post (1)


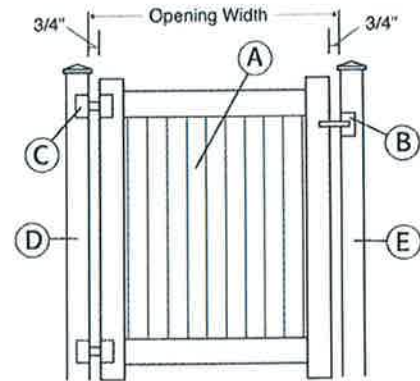


Figure 27

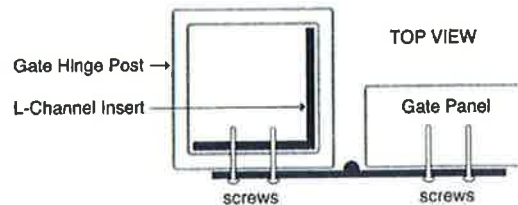

HANGING THE GATE

STEP 1

Position the gate in the gate opening and block-up the gate as necessary to line up the horizontal gate rails with those of the fence (Fig. 28). Attach hinges and latch to the gate and posts per the installation instructions packaged with the hardware.

STEP 2

Install gate post caps (refer to Section 7 - Installing Post Caps).

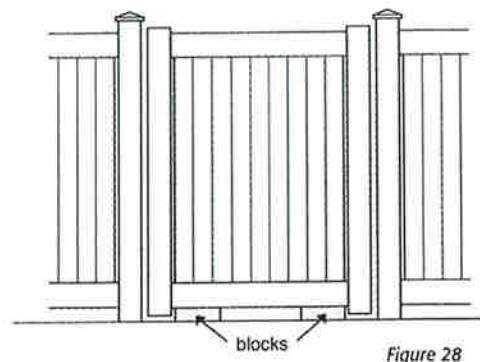


Figure 28